

GeneQuery™ Human Cell Junctions qPCR Array Kit (GQH-JXN)

Catalog #GK090

Product Description

ScienCell's GeneQueryTM Human Cell Junctions qPCR Array Kit (GQH-JXN) profiles 88 key genes involved in cell junction formation, organization, and maintenance. This kit surveys cell-cell junctions that are important for cellular communication, paracellular transport, and anchoring. Brief examples of how included genes may be categorized are shown below:

- Gap junctions: AP2M1, CLTA, CLTCL1, GJA1, GJB1, PANX1
- Adherens junctions: ANG, CADM1, CDH2, CDH5, FAT2, NECTIN2
- Tight junctions: CDX2, CLDN1, CLDN5, JAM2, SNAI1, TJP1 (ZO-1)
- Desmosomes: DSC1, DSG1, DSP, ITGB4, JUP

GeneQueryTM qPCR array kits are qPCR ready in a 96-well plate format, with each well containing one primer set that recognizes and efficiently amplifies a specific target gene's cDNA. The carefully designed primers ensure that: (i) the optimal annealing temperature in qPCR analysis is 65°C (with 2 mM Mg²⁺ and no DMSO); (ii) the primer set recognizes all known transcript variants of the target gene, unless otherwise noted; and (iii) only one gene is amplified. Each primer set has been validated by qPCR with melt curve analysis and gel electrophoresis.

GeneQueryTM qPCR Array Kit Controls

Each GeneQueryTM plate contains eight controls (Figure 1):

- Five target housekeeping genes (β-actin, GAPDH, LDHA, NONO, and PPIH), which enable normalization of data.
- The Genomic DNA (gDNA) Control (GDC), which detects gDNA contamination in cDNA samples. This primer set targets a non-transcribed region of the genome.
- Positive PCR Control (PPC), which tests whether samples contain inhibitors or other factors that may negatively affect gene expression results. The PPC consists of a predispensed synthetic DNA template and a primer set that can amplify it. The sequence of the DNA template is not present in the human genome and thus tests the efficiency of the polymerase chain reaction itself.
- The No Template Control (NTC), which can be used to monitor DNA contamination introduced during workflow (e.g. from such sources as reagents, tips, and the lab bench).

Kit Components

Component	Quantity	Storage	
GeneQuery [™] array plate with lyophilized primers	1	4°C or -20°C	
Optical PCR plate seal	1	RT	
Nuclease-free H ₂ O	2 mL	4°C	

Additional Materials Required (Materials Not Included in Kit)

Component	Recommended	
Reverse transcriptase	MultiScribe Reverse Transcriptase (Life Tech, Cat. #4311235)	
cDNA template	Customers' samples	
qPCR master mix	FastStart Essential DNA Green Master (Roche, Cat. #06402712001)	

Quality Control

All primer sets are validated by qPCR with melt curve analysis and analyzed by gel electrophoresis. Single band amplification is confirmed for each set of primers.

Product Use

GQH-ANG is for research use only. It is not approved for human or animal use or for application in clinical or *in vitro* diagnostic procedures.

Shipping and Storage

This product is shipped at ambient temperature. Upon receipt, the plate should be stored at 4°C and is good for up to 12 months. For long-term storage (>1 year), store at -20°C in a manual defrost freezer.

Note: The primers in each well are lyophilized.

- 1. Prior to use, allow plates to warm to room temperature.
- 2. Briefly centrifuge at 1,500x g for 1 minute before slowly peeling off the seal.
- 3. Prepare 20 µl PCR reactions for one well as shown in Table 1.

Table 1

cDNA template	0.2 – 250 ng
2x qPCR master mix	10 μl
Nuclease-free H ₂ O	variable
Total volume	20 μl

Important: Only use polymerases with hot-start capability to prevent possible primer-dimer formation. *Only* use nuclease-free reagents in PCR amplification.

4. Add the mixture of 2x qPCR master mix, cDNA template, and nuclease-free H₂O to each well containing the lyophilized primers. Seal the plate with the provided optical PCR plate seal.

Important: In NTC control well, do NOT add cDNA template. Add 2x qPCR master mix and nuclease-free H2O only.

- 5. Briefly centrifuge the plates at 1,500x g for 1 minute at room temperature. For maximum reliability, replicates are strongly recommended (minimum of 3).
- 6. For PCR program setup, please refer to the instructions of the master mix of the user's choice. We recommend a typical 3-step qPCR protocol for a 200nt amplicon:

Three-step cycling protocol

Step	Temperature	Time	Number of cycles
Initial denaturation	95°C	10 min	1
Denaturation	95°C	20 sec	
Annealing	65°C	20 sec	40
Extension	72°C	20 sec	40
Data acquisition	Plate read		
Recommended	Melting curve analysis		1
Hold	4°C Indefinite		1

7. (Optional) Load the PCR products on 1.5% agarose gel and perform electrophoresis to confirm the single band amplification in each well.

Figure 1. Layout of GeneQueryTM qPCR array kit controls.

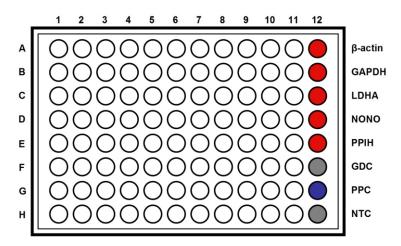


Table 2. Interpretation of control results:

Controls	Results	Interpretation	Suggestions
Housekeeping gene controls	Variability of a housekeeping gene's Cq value	The expression of the housekeeping gene is variable in samples; cycling program is incorrect	Choose a constantly expressed target, or analyze expression levels of multiple housekeeping genes; use correct cycling program and make sure that all cycle parameters have been correctly entered
gDNA Control (GDC)	Cq ≥ 35	No gDNA detected	N/A
	Cq < 35	The sample is contaminated with gDNA	Perform DNase digestion during RNA purification step
Positive PCR Control (PPC)	Cq > 30; or The Cq variations > 2 between qPCR Arrays.	Poor PCR performance; possible PCR inhibitor in reactions; cycling program incorrect	Eliminate inhibitor by purifying samples; use correct cycling program and make sure that all cycle parameters have been correctly entered
No Template Control (NTC)	Positive	DNA contamination in workflow	Eliminate sources of DNA contamination (reagents, plastics, etc.)

Figure 2. A typical amplification curve showing the amplification of a qPCR product.


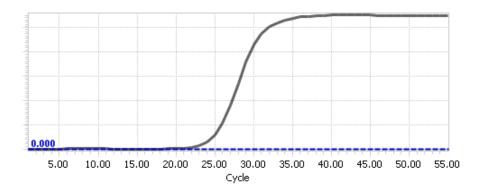


Figure 3. A typical melting peak of a qPCR product.

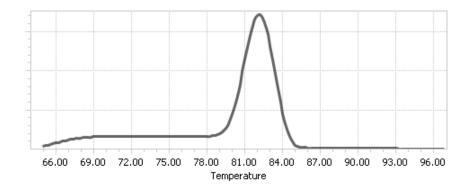

Quantification Method: Comparative ΔΔCq (Quantification Cycle Value) Method

1. **Note:** Please refer to your qPCR instrument's data analysis software for data analysis. The method provided here serves as guidance for quick manual calculations.

You can use one or more housekeeping genes as a reference to normalize samples.

Important: We highly recommend using all 5 housekeeping genes included in this kit, β -actin, GAPDH, LDHA, NONO, and PPIH.

2. For a single housekeeping gene, Δ Cq (ref) is the quantification cycle number change for that housekeeping gene (HKG) between an experimental sample and control sample.

$$\Delta$$
Cq (ref) = Cq (HKG, experimental sample) - Cq (HKG, control sample)

When using multiple housekeeping genes as a reference, we recommend normalizing using the geometric mean [1] of the expression level change, which is the same as normalizing using the arithmetic mean of ΔCq of the selected housekeeping genes.

 ΔCq (ref) = average (ΔCq (HKG1), ΔCq (HKG2),....., ΔCq (HKG n)) (n is the number of housekeeping genes selected)

If using all 5 housekeeping genes included in this kit, β-actin, GAPDH, LDHA, NONO, and PPIH, use the following formula:

$$\Delta$$
Cq (ref) = $(\Delta$ Cq(β -actin)+ Δ Cq(GAPDH)+ Δ Cq(LDHA)+ Δ Cq(NONO)+ Δ Cq(PPIH)) /5

Note: Δ Cq (HKG) = Cq (HKG, experimental sample) - Cq (HKG, control sample), and Δ Cq (HKG) value can be positive, 0, or negative.

3. For any of your genes of interest (GOI),

$$\Delta$$
Cq (GOI) = Cq (GOI, experimental sample) - Cq (GOI, control sample)

$$\Delta\Delta Cq = \Delta Cq (GOI) - \Delta Cq (ref)$$

Normalized GOI expression level fold change = $2^{-\Delta\Delta Cq}$

References

[1] Vandesompele J, De Preter K, Pattyn F, Poppe B, Van Roy N, De Paepe A, Speleman F. (2002) "Accurate normalization of real-time quantitative RT-PCR data by geometric averaging of multiple internal control genes." *Genome Biol.* 3(7): 1-12.

Example: Comparative ΔΔCq (Quantification Cycle Value) Method

Table 3. Cq (Quantification Cycle) values of 2 genes-of-interest and 5 housekeeping genes obtained for experimental and control samples.

Genes of Interest	Housekeeping Genes

Samples	GOI1	GOI2	β-actin	GAPDH	LDHA	NONO	PPIH
Experimental	21.61	22.19	17.16	17.84	20.12	19.64	26.40
Control	33.13	26.47	18.20	18.48	20.57	19.50	26.55

$$\Delta Cq \ (ref) = (\Delta Cq(\beta \text{-actin}) + \Delta Cq(GAPDH) + \Delta Cq(LDHA) + \Delta Cq(NONO) + \Delta Cq(PPIH)) \ /5$$

$$= ((17.16 \text{-} 18.20) + (17.84 \text{-} 18.48) + (20.12 \text{-} 20.57) + (19.64 \text{-} 19.50) + (26.40 \text{-} 26.55)) \ /5$$

$$= -0.43$$

$$\Delta$$
Cq (GOI1) = 21.61 - 33.13
= -11.52

$$\Delta$$
Cq (GOI2) = 22.19 - 26.47
= -4.28

$$\Delta\Delta$$
Cq (GOI1) = Δ Cq (GOI1) - Δ Cq (ref)
= -11.52 - (-0.43)
= -11.09

$$\Delta\Delta Cq (GOI2) = \Delta Cq (GOI2) - \Delta Cq (ref)$$

$$= -4.28 - (-0.43)$$

$$= -3.85$$

Normalized GOI1 expression level fold change =
$$2^{-\Delta\Delta Cq \text{ (GOI1)}}$$

= $2^{11.09}$
= 2180

Normalized GOI2 expression level fold change =
$$2^{-\Delta\Delta Cq \text{ (GOI2)}}$$

= $2^{3.85}$
= 14.4

Conclusion: Upon treatment, expression level of GOI1 increased 2,180 fold, and expression level of GOI2 increased 14.4 fold.



GeneQuery™ Human Cell Junctions qPCR Array (GQH-JXN)

Catalog #GK090

GeneQueryTM Human Cell Junctions qPCR Array Plate Layout* (8 controls in Bold and Italic)

-	1	2	3	4	5	6	7	8	9	10	11	12
Α	ACTA1	CADM1	CDH19	CELSR3	CLDN8	CXADR	DSP	GJA5	JAM3	NECTIN3	PECAM1	β-actin
В	ACTA2	CADM3	CDH2	CGN	CLTA	DCHS1	F11R	GJB1	JUP	OCLN	PVR	GAPDH
С	ACTB	CDH1	CDH3	CLDN1	CLTB	DCHS2	FAT1	GJB6	LEF1	PAK1	RHOA	LDHA
D	ACTC1	CDH10	CDH5	CLDN10	CLTC	DNM1	FAT2	ICAM1	MAGI1	PANX1	SNAI1	NONO
Ε	ACTG1	CDH11	CDX1	CLDN2	CLTCL1	DSC1	FAT3	ILK	MAGI2	PARD3	SP1	PPIH
F	ACTG2	CDH13	CDX2	CLDN4	CSNK1D	DSC2	FAT4	ITGB1	MYLK	PARD6A	SRC	GDC
G	ANG	CDH15	CELSR1	CLDN5	CTNNB1	DSG1	GJA1	ITGB4	NECTIN1	PCDH7	TJP1	PPC
н	AP2M1	CDH16	CELSR2	CLDN7	CTNND1	DSG3	GJA4	JAM2	NECTIN2	PCDH8	WNK4	NTC

^{*} gene selection may be updated based on new research and development

Plate type A

Brand	Model	kit catalog #
ABI / Life Tech	ABI 5700	GK090-A
	ABI 7000	GK090-A
	ABI 7300	GK090-A
	ABI 7500	GK090-A
	ABI 7700	GK090-A
	ABI 7900 HT	GK090-A
	QuantStudio	GK090-A
	ViiA 7	GK090-A
Bio-Rad	Chromo4	GK090-A
	iCycler	GK090-A
	iQ5	GK090-A
	MyiQ	GK090-A
	MyiQ2	GK090-A
Eppendorf / Life Tech	Matercycler ep realplex 2	GK090-A
	Matercycler ep realplex 4	GK090-A
Stratagene	MX3000P	GK090-A
	MX3005P	GK090-A

Plate type B

Brand	Model	kit catalog #
ABI / Life Tech	ABI 7500 Fast	GK090-B
	ABI 7900 HT Fast	GK090-B
	QuantStudio Fast	GK090-B
	StepOnePlus	GK090-B
	ViiA 7 Fast	GK090-B
Bio-Rad	CFX Connect CFX96	GK090-B GK090-B
	DNA Engine Opticon 2	GK090-B
Stratagene	MX4000	GK090-B

Plate type C

Brand	Model	kit catalog #
Roche	Lightcycler 96	GK090-C
	Lightcycler 480 (96-well)	GK090-C